



ANTHOLOGY WOODS



our wood has a story



QUALITY RECLAIMED WOOD FILLED WITH HISTORY

Each plank of our wood carries a rich history that adds character and warmth to interior and exterior spaces. From rustic, saw-traced oak straight from the barn, to resurfaced modern paneling, our diverse range of products fit any style. Our products qualify for many sustainable building initiatives and help divert materials waste while reducing logging pressures on new wood.

Beautiful Wood From A Responsible Source.





WOOD WITH A STORY

When you invest in reclaimed, recovered, and responsibly-harvested wood, you are choosing a sustainable, quality wood product infused with enduring beauty.

Each source has a unique story behind it, a former life, and a chance for a new chapter in a continuing cycle of re-use.

Reclaimed wood involves meticulous care in the deconstruction, sorting for character, de-metalling, trimming for quality and filling holes where appropriate.

It is truly a labor of love; one that offers a distinctively unique product filled with a rich history.

our process

RECLAIMING OUR WOOD

Our process begins with sourcing. We have a global supply chain network to access the highest quality exotic and domestic wood. We love sourcing unique wood, like old wine tanks and gymnasium bleachers.

Our species selection covers the globe, with imports like teak and European oak, domestic stalwarts like redwood, cedar, fir and white oak, and domestic exotics, including Claro and French walnut, and Oregon white oak.

We work with suppliers ranging from small, family run businesses to large international companies.

Together with our production team and robust network of partners, we have the ability to take reclaimed wood straight from the source, be it a barn, fence, bridge or other structure, and turn it into beautiful finished products.

We take old wood and give it a fresh, new life.





Declare.

Reclaimed Solid Wood Flooring & Paneling Anthology Woods

Final Assembly: Ashland, Oregon, USA
Life Expectancy: 10-100 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Biodegradable/Compostable (100%), Recyclable (100%)
EU CoC Screened: Does Not Contain

Ingredients:

Wood: Various Species; **Natural Oil Finish:** Undisclosed (0.04%); **Low-VOC Polyurethane Finish:** Water

¹LBC Temp Exception RL-004b - Proprietary Ingredients in Declare

Living Building Challenge Criteria: Compliant

I-13 Red List:

- LBC Red List Free % Disclosed: 99.96% at 100ppm
- LBC Red List Approved VOC Content: Not Applicable
- Declared

I-10 Interior Performance: CDPH Standard Method v1.1-2010

I-14 Responsible Sourcing: Product Available with FSC Chain of Custody; Salvaged Wood Content; Low Risk Wood

ANW-001
EXP. 01 OCT 2022
SCREENED: 29 SEP 2021
Original Issue Date: 2021

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

SUSTAINABILITY MATTERS

Sustainability is a vital part of our ethos. We are proud to provide FSC® certified and sustainably-sourced wood to support your green building project



Our solid reclaimed products are salvaged or FSC® (Forest Stewardship Council®) Certified, and engineered products are available on new-wood FSC substrates by request for LEED (Leadership in Energy and Environmental Design) requirements.

FSC certification ensures that the wood supports responsibly-harvested forests as well as transparent chain of custody manufacturing and processing.



We are proud to have published a Declare Label for our Reclaimed Solid Wood Flooring & Paneling, with Unfinished, Oil Finish & Low-VOC Poly Finish. This label covers over 40 products, which do not contain any Red List chemicals. This label ensures that our wood flooring & paneling promotes healthy indoor air quality.

Declare labels are useful tools for many green building initiatives, including the Living Building Challenge, LEED and WELL Building Standard.



Health Product Declarations (HPDs) are an important tool for designers and architects to specify building materials and products that are eco-friendly and low-emitting for LEED and other green building projects.

HPDs were created to increase transparency by disclosing the human and environmental health impacts of ingredients and materials. We have published HPDs for some of our wood products, making them a perfect choice for green building initiatives.



We believe in the importance of manufacturing here in the United States, and are proud to offer most of our products made here in the USA. Controlling the manufacturing process and production details ensures that we make our wood to your exact specifications.

We value supporting our workers locally and producing a truly spectacular product.



our team

ABOUT US

Our team is composed of former contractors, designers, builders, creatives and entrepreneurs with more than three decades of industry experience working directly with architects, designers and contractors.

We understand the challenges architects and designers have specifying products due to changing inventory, inadequate information and fluctuating prices and quality. Our team offers personalized customer service throughout the project, focusing on providing the perfect product.

To us it's about the planet, our families and our future.
And of course, our love of reclaimed wood.

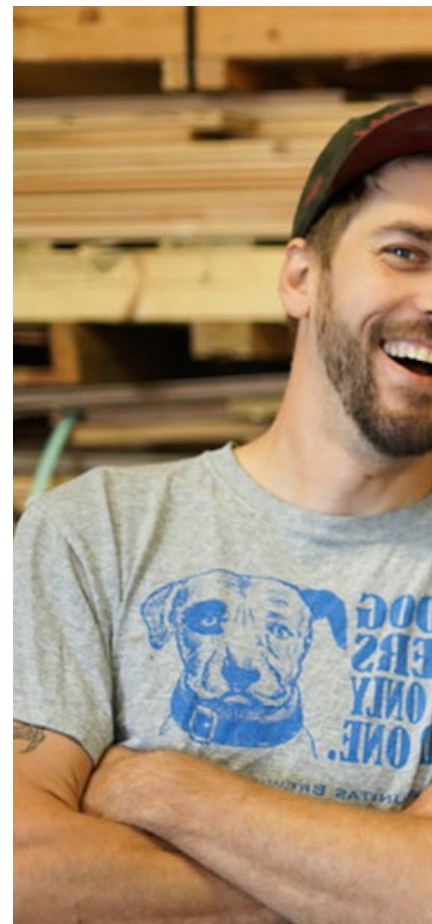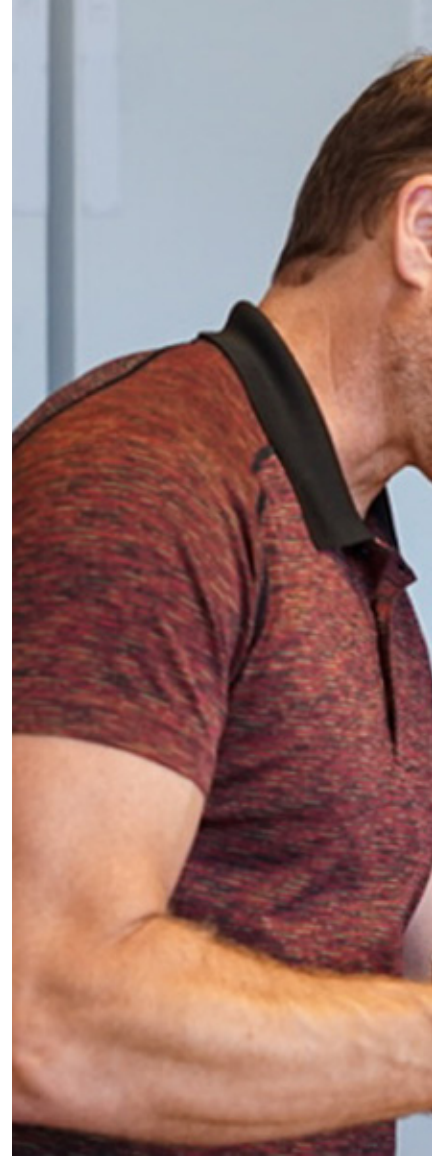



WOODOLOGY 101

types of profiles



THINCLAD TONGUE & GROOVE WITH MICRO-BEVEL

At a lightweight 3/8" thick, ThinClad Paneling is recommended for most interior wall cladding as an economical, easy-to-install option



SQUARE EDGE PLANK

Common profile for weathered reclaimed wood for use on interior walls & ceilings



TONGUE & GROOVE

Standard profile for solid cladding and solid flooring applications



SQUARE CHANNEL REVEAL

Standard on most solid exterior siding for a rustic effect



SHIPLAP PANELING

For a classic shiplap effect with a gap, this profile works both on interior wall paneling and exterior siding



TONGUE & GROOVE WITH MICRO-BEVEL

Standard on most engineered products, T&G with Micro-Bevel is recommended for most pre-finished items & wall cladding

grades/character

Reclaimed and salvaged wood comes from a variety of sources, making it challenging to offer the wood grades common in the new-wood industry.

Much of our post-consumer reclaimed wood comes in one grade, often showing much of the character inherent from previously used materials (nail holes, oxides stains, saw trace marks, etc.).

We believe this distinctive character adds unmatched beauty to the wood, offering a glimpse into the past.


We offer some of our FSC® Certified and salvaged wood as Character or Select Grade, and some of our softwood products as Vertical or Mixed Grain. Please inquire about a specific product for more information.

solid + engineered options



SOLID FLOORING

Our solid wood flooring and paneling offers an elegant look to any space that lasts a lifetime



ENGINEERED FLOORING

Our engineered products are available as a sustainable flooring or paneling option that is both durable and attractive. If installation against a concrete subfloor is necessary, engineered hardwood is a perfect choice. FSC® Certified substrate is available upon request.





MODERN RECLAIMED

Much more than rustic barn wood, we offer a range of reclaimed, salvaged and sustainable wood that uplifts and enhances elegant and modern designs



Salvaged Left Coast White Oak Paneling
at The Park James Hotel





HARDWOOD CLADDING

Revered for impressive hardness and expressive character and grain patterns, these hardwood cladding options offer both beauty and performance for interior projects




DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths
ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Select & Character Grade

APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Benches, Beams, & Custom Applications.

FINISHES Natural Oil, Low-VOC Poly, Oxley, Zane Grey, Espresso Brown, Pearly, Deep Sumi, & Custom Finishes

SUSTAINABILITY FSC® Certified. LEED Credits Available.




DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths
ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Plus Grade

APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Benches, Beams, & Custom Applications.

FINISHES Natural Oil, Low-VOC Poly, Oxley, Zane Grey, Espresso Brown, Deep Sumi, & Custom Finishes

SUSTAINABILITY Recovered and upcycled byproduct from contemporary harvest of conifer trees. LEED Credits Available.






HERITAGE OAK

OIL FINISH



OIL FINISH



POLY FINISH

DIMENSIONS SOLID FLOORING & CLADDING: 3/4" thick x 4-7/8" fixed width x 1'-10' solid random lengths
 THINCLAD PANELING: 3/8" thick x 5" fixed width x 2'-10' solid random lengths
 ENGINEERED FLOORING: 5/8" thick x 4-7/8" fixed width x 1'-10' solid random lengths. Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade

APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Benches, Beams, & Custom Applications.

FINISHES Natural Oil, Low-VOC Poly, Oxley, Zane Grey, Espresso Brown, Deep Sumi, & Custom Finishes

SUSTAINABILITY Post-consumer FSC® Certified Recycled. LEED Credits Available.



Legacy White Oak with Low-VOC poly finish

HARDWOOD CLADDING





PROJECT SPOTLIGHT

waunakee public library

The Waunakee Library provides a variety of community resources within the 40,000 square foot area. The library includes multiple collaborative areas, meeting rooms and dedicated youth areas for an inclusive learning environment.

A central staircase leads up to the second floor, where visitors can peer into a study room framed by our Heritage Oak ThinClad paneling. In addition to this striking, wood-framed interior window, the design team installed feature walls throughout the space with the same reclaimed wood cladding to bring natural warmth into the space.

PRODUCT DETAILS



Reclaimed Heritage Oak with Zero-VOC Natural Oil Finish

PROJECT DETAILS

Design: OPN Architects

Location: Waunakee, WI

Photography: Mike Rebolz





DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths
ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Plus Grade

APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Benches, & Custom Applications.

FINISHES Natural Oil, Low-VOC Poly, & Custom Finishes

SUSTAINABILITY Recovered and upcycled byproduct from contemporary harvest of conifer trees in the Pacific Northwest. LEED Credits Available.



DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths
ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade

APPLICATION Flooring, Interior Cladding, & Custom Applications.

FINISHES Natural Oil, Low-VOC Poly, Carmel Finish & Custom Finishes


SUSTAINABILITY Recovered and upcycled byproduct from contemporary harvest of conifer trees. LEED Credits Available.



BIDWELL WALNUT

OIL FINISH

- DIMENSIONS** SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-5' solid random lengths
THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 1'-5' solid random lengths
ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-5' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.
- GRADE** Character Grade
- APPLICATION** Flooring, Interior Cladding, Stair Treads, Tables & Custom Applications.
- FINISHES** Natural Oil, Low-VOC Poly, Nordic & Custom Finishes
- SUSTAINABILITY** Roadside salvage and orchard recovery. LEED Credits Available.



OIL FINISH



POLY FINISH



NORDIC FINISH



Pacific Golden Oak Wall
Paneling in Carmel Finish

HARDWOOD CLADDING




HARDWOOD CLADDING

Sawmill Oak Ceiling Paneling




SAWMILL OAK

OIL FINISH



UNFINISHED



POLY FINISH

DIMENSIONS SOLID FLOORING & CLADDING:
5/8" thick x (specified width) x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths
ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade

APPLICATION Flooring, Interior Cladding, & Custom Applications.

FINISHES Natural Oil, Low-VOC Poly & Custom Finishes

SUSTAINABILITY FSC* Certified post-consumer reclaimed from sources including barns, out-buildings, warehouses and factories. LEED Credits Available.



OIL FINISH



INDUSTRIAL OAK

DIMENSIONS SOLID CLADDING:
5/8" thick x 5" fixed width x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 3 & 5" mixed widths x 2'-10' solid random lengths

GRADE Character Grade

APPLICATION Interior Cladding & Custom Applications

FINISHES Unfinished Natural Weathered Face, Custom Finishes Available

SUSTAINABILITY FSC* Certified Post-Consumer Recycled from sources including barns, out-buildings, warehouses and factories. LEED Credits Available.



GREY MEDLEY OAK

DIMENSIONS SOLID CLADDING:
3/4" thick x 4-1/2" face width x 1'-7" solid random lengths.
Tongue & groove profile.
THINCLAD PANELING:
3/8" thick x 5" fixed width x 1'-7" solid random lengths.
Square edge plank profile.

GRADE Character Grade

APPLICATION Interior Cladding & Custom Applications

FINISHES Unfinished Natural Weathered Face, Custom Finishes Available

SUSTAINABILITY FSC* Certified Post-Consumer Recycled from agricultural sources in the eastern United States. LEED Credits Available.




product spotlight

LEFT COAST WHITE OAK

This natural beauty from the untamed far west, Left Coast White Oak is at home in a rustic country and stark modern environment alike. Perhaps the hardest available white oak for flooring, this variety grows exclusively in a narrow swath of the West, or “left” coast, between the 34th & 49th parallels, and is 25% harder than common white oak from the eastern United States. Available in a Character Plus Grade, which embraces the natural rugged features of this unique west coast oak.


Evoking a connection to the raw and dramatic slopes of the Cascades, Left Coast White Oak is full of inherent allure. You’ll see a variety of grain patterns, knots and checks, and colors ranging from luminous soft wheat and pale caramel, to deep sun-kissed tan and includes accents of rich espresso and obsidian mineral streaks.

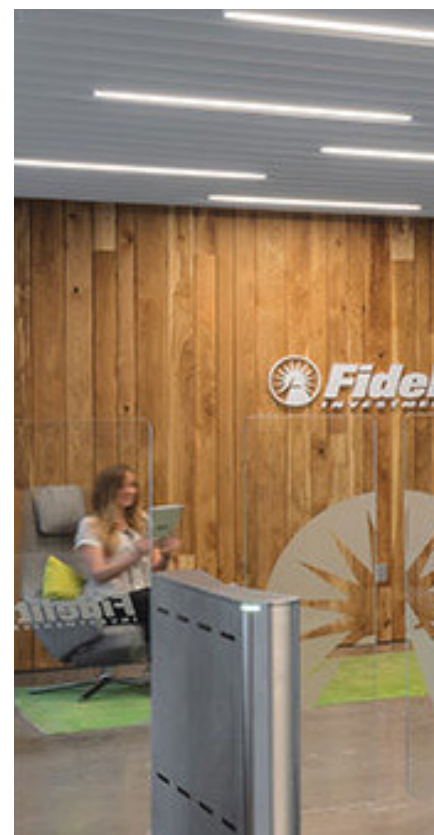

Left Coast White Oak Paneling and
Flooring with Natural Oil Finish



Left Coast White Oak Paneling & Custom Table Tops at Milk Money Restaurant

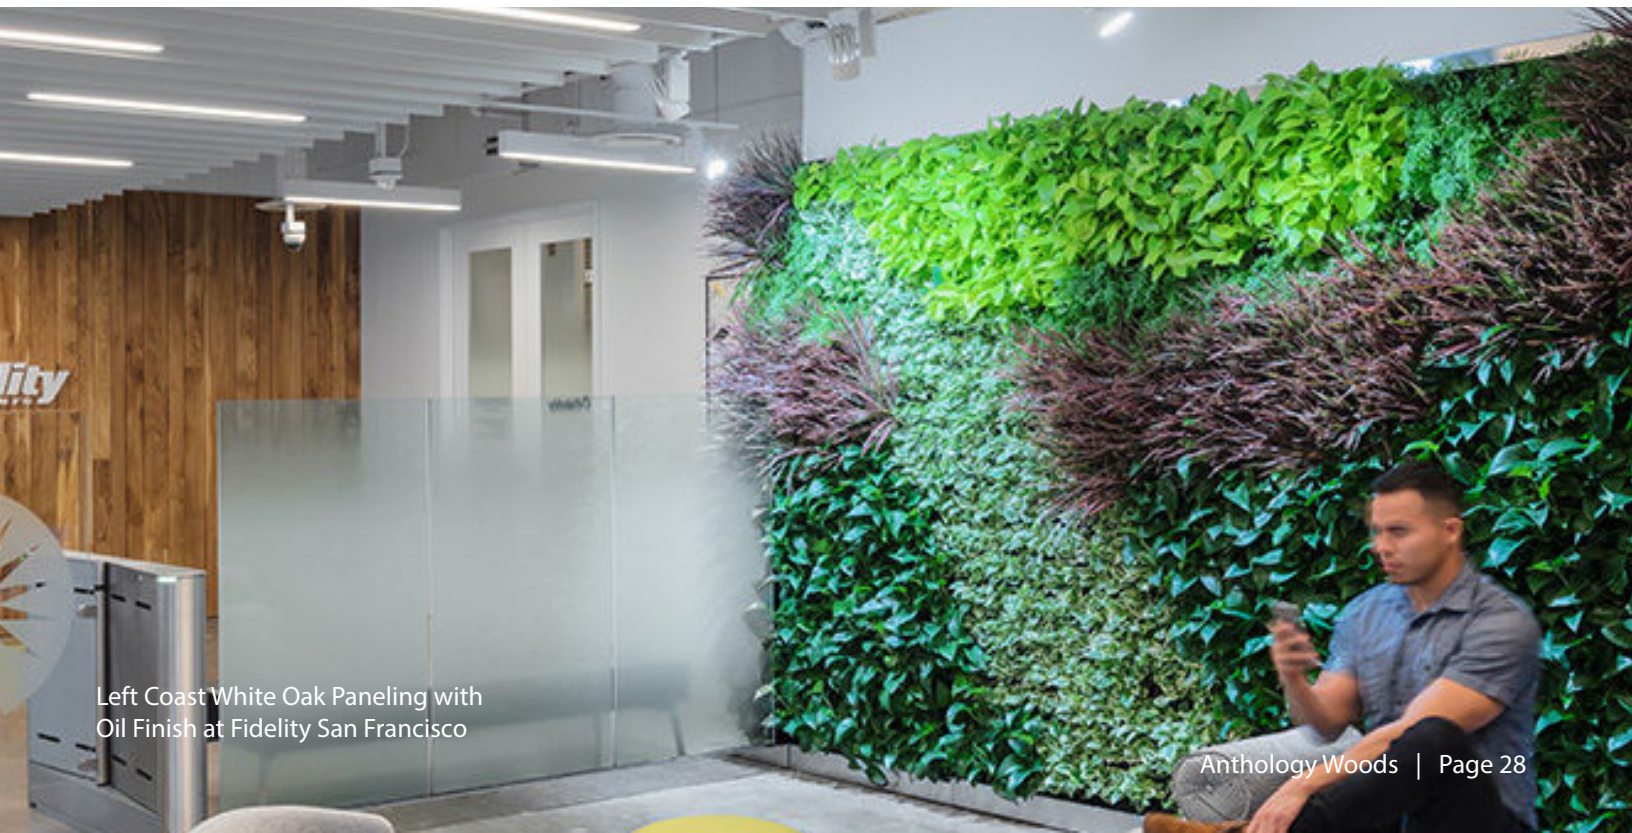

Left Coast White Oak Paneling with Oil Finish at Fidelity San Francisco





EVERGREEN CLADDING

Revered for impressive hardness and expressive character and grain patterns, these hardwood cladding options offer both beauty and performance for interior projects.




STOUT'S LEGACY REDWOOD

STOUT'S LEGACY WEATHERED



STOUT'S LEGACY WEATHERED



STOUT'S LEGACY ANTIQUE


DIMENSIONS SOLID CLADDING:
5/8" thick x 4-1/2" & 6-1/2" mixed widths x 1'-5' solid random lengths
REBORN: 9/16" thick x 4-1/2" & 6-1/2" mixed widths x 1'-5' solid random lengths

GRADE Character Grade


APPLICATION Interior Cladding & Custom Applications

FINISHES Reborn, Rustic, White-Washed, Antique, & Custom Finishes Available

SUSTAINABILITY FSC® Certified Post-Consumer Recycled from agricultural structures in Northern California. LEED Credits Available.



STOUT'S LEGACY WHITE WASHED



STOUT'S LEGACY REBORN



FRONTIER BLEND

ANTIQUÉ FRONTIER BLEND


DIMENSIONS SOLID CLADDING:
5/8" thick x 3, 5 and 7" mixed widths x 2' and longer solid random lengths

GRADE Character Grade


APPLICATION Interior Cladding & Custom Applications

FINISHES Rustic, Antique & Custom Finishes Available

SUSTAINABILITY FSC® Certified Post-Consumer Recycled from structures in the Pacific Northwest United States. LEED Credits Available.



RUSTIC FRONTIER BLEND



ANTIQUÉ FRONTIER BLEND



Stout's Legacy Weathered Redwood
Paneling at Superica Restaurant

EVERGREEN CLADDING

GRANDSTAND PINE

OIL FINISH

DIMENSIONS SOLID CLADDING: 5/8" thick x 4" or 8" widths x 2'-12' solid random lengths or longer
 ENGINEERED FLOORING: 5/8" thick x (specified width) x 2'-12' solid random lengths. Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade


APPLICATION Interior Cladding & Custom Applications

FINISHES Unfinished, Natural Oil Finish, Low-VOC Poly Finish, Deep Sumi Finish, Nordic Finish, Blackboard Pine Finish & Custom Finishes Available

SUSTAINABILITY FSC® Certified Post-Consumer Recycled from sources including high school and college gymnasium bleachers throughout the United States. LEED Credits Available.



UNFINISHED




POLY FINISH




OIL FINISH



NORDIC PINE



BLACKBOARD PINE



DEEP SUMI PINE

GRANDSTAND FIR

MIXED GRAIN
POLY FINISH


DIMENSIONS SOLID FLOORING & CLADDING: 3/4" thick x 4" or 8" widths x 2'-12' solid random lengths or longer
 THINCLAD PANELING: 3/8" thick x 4" width x 2'-12' solid random lengths or longer
 ENGINEERED FLOORING: 5/8" thick x (specified width) x 2'-12' solid random lengths. Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRAIN OPTIONS Vertical Grain, Mixed Grain

APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Benches & Custom Applications

FINISHES Unfinished, Natural Oil Finish, Low-VOC Poly Finish, Deep Sumi Finish & Custom Finishes Available


SUSTAINABILITY FSC® Certified Post-Consumer Recycled from sources including high school and college gymnasium bleachers throughout the United States. LEED Credits Available.



VERTICAL GRAIN
UNFINISHED



MIXED GRAIN
POLY FINISH





DEEP SUMI FIR

BUCKHORN CEDAR



UNFINISHED


- DIMENSIONS** SIDING & PANELING:
3/4" thick x 5-1/4" standard width x 4'-12' solid random lengths
- GRADE** Character Plus Grade
- APPLICATION** Interior Wall & Ceiling Cladding, Exterior Siding, Tables, Benches & Custom Applications
- FINISHES** Unfinished, Natural Oil Finish, Low-VOC Poly Finish, Nordic Finish, Deep Sumi Finish & Custom Finishes Available
- SUSTAINABILITY** Recovered byproduct from contemporary harvest of conifer trees along the West Coast. LEED Credits Available.




UNFINISHED



OIL FINISH



NORDIC CEDAR



DEEP SUMI CEDAR



Blackboard Pine Wall Cladding at Willow & Whisk Cafe and Restaurant

EVERGREEN CLADDING



EVERGREEN CLADDING

White Surfriider Redwood Cladding

SURFRIDER REDWOOD

MING BLUE

DIMENSIONS SOLID CLADDING:
5/8" thick x 4-1/2" & 6-1/2" mixed widths x 1'-5' solid random lengths

GRADE Character Grade

APPLICATION Interior Cladding & Custom Applications

FINISHES Canary Yellow, Bright Green, Aqua Blue, Tomato Red, Ming Blue, Light Gray, Dark Gray, Black, White & Custom Colors & Finishes Available


SUSTAINABILITY FSC® Certified Post-Consumer Recycled from agricultural structures in Northern California. LEED Credits Available.




WHITE



MING BLUE



LIGHT GRAY




DARK GRAY



CANARY YELLOW




AQUA BLUE



BRIGHT GREEN



TOMATO RED



BLACK

economical wall cladding

THINCLAD PANELING

Our collection of solid sustainable wood wall & ceiling paneling conserves resources and maximizes value with an economical thickness. ThinClad products measure 3/8" thick and deliver excellent quality with precision milling with the option to install with hidden fasteners.

Most of our wall & ceiling paneling can be milled to ThinClad specifications at a variety of widths, with a range of specialty finishes and sources. ThinClad paneling offers a lighter & thinner cladding with stunning results.




Blackboard Pine ThinClad
Paneling at Willow & Whisk Cafe







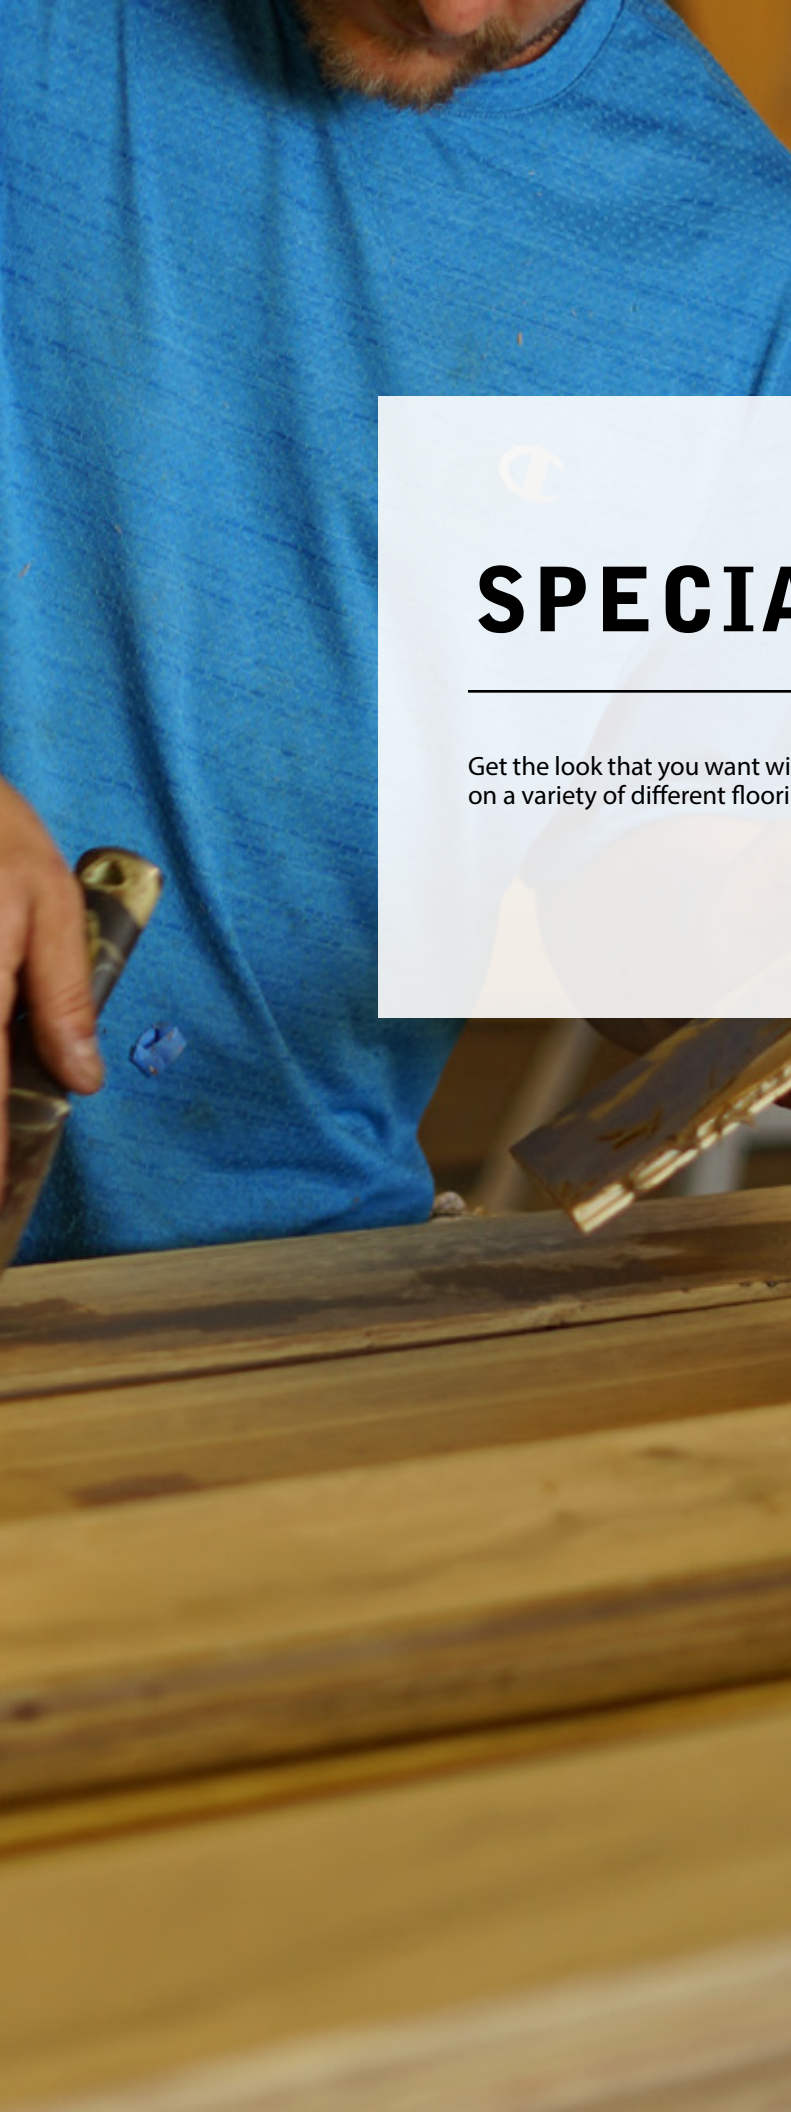

SPECIALTY FINISHES

Get the look that you want with our array of specialty colors and textures, available on a variety of different flooring and cladding sources.



DIMENSIONS SOLID CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths

THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths

ENGINEERED CLADDING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Select, Character & Character Plus Grade

APPLICATION Interior Wall & Ceiling Cladding & Custom Applications

FINISHES Specialty Pearly White Finish

SUSTAINABILITY Variable sources. Please Inquire. LEED Credits Available.



DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths

THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths

ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Select, Character & Character Plus Grade

APPLICATION Flooring, Interior Cladding & Custom Applications

FINISHES Specialty Zane Grey Finish

SUSTAINABILITY Variable sources. Please Inquire. LEED Credits Available.



DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths

THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths

ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Select, Character & Character Plus Grade

APPLICATION Flooring, Interior Cladding & Custom Applications

FINISHES Specialty Oxley Finish

SUSTAINABILITY Variable sources. Please Inquire. LEED Credits Available.





DIMENSIONS SOLID FLOORING & CLADDING
3/4" thick x (specified width) x 1'-10' solid random lengths

THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths

ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Select, Character & Character Plus Grade

APPLICATION Flooring, Interior Cladding & Custom Applications

FINISHES Specialty Espresso Brown Finish

SUSTAINABILITY Variable sources. Please Inquire. LEED Credits Available.



DIMENSIONS SOLID CLADDING:
3/4" thick x (specified width) x 1'-10' solid random lengths

THINCLAD PANELING:
3/8" thick x 3, 4, & 5" mixed widths x 2'-10' solid random lengths


ENGINEERED CLADDING:
5/8" thick x (specified width) x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Select, Character & Character Plus Grade

APPLICATION Interior Wall & Ceiling Cladding & Custom Applications

FINISHES Specialty Deep Sumi Finish

SUSTAINABILITY Variable sources. Please Inquire. LEED Credits Available.

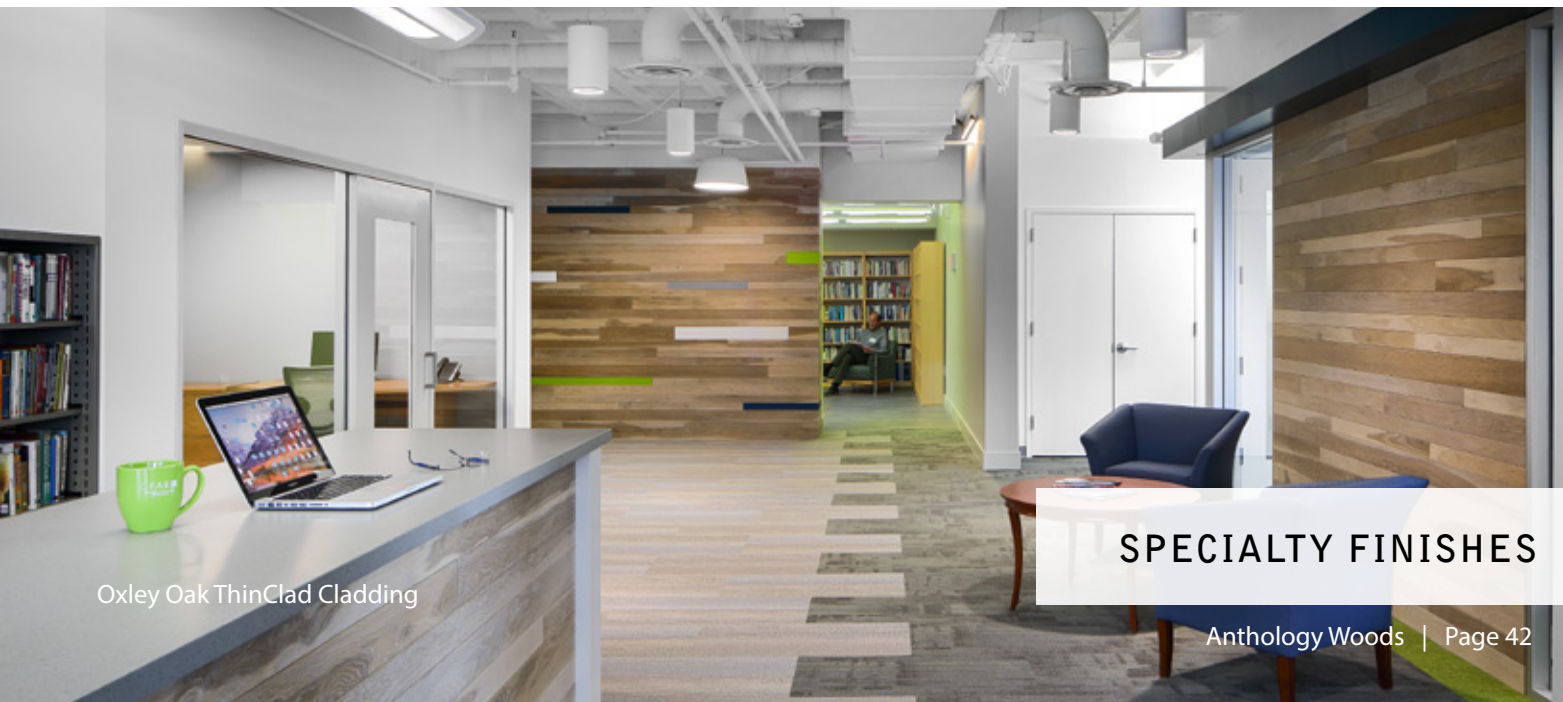

Oxley Oak ThinClad Cladding

SPECIALTY FINISHES



NORDIC COLLECTION



DIMENSIONS SOLID CLADDING:
5/8" thick x 4" and 8" widths x 2'-12' solid random lengths


ENGINEERED CLADDING:
5/8" thick x (specified width) x 2'-12' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade

APPLICATION Interior Cladding, Tables, Benches & Custom Applications

FINISHES Specialty Nordic Pine Finish

SUSTAINABILITY FSC® Certified Post-consumer reclaimed from sources including high school and college gymnasium bleachers. LEED Credits Available.

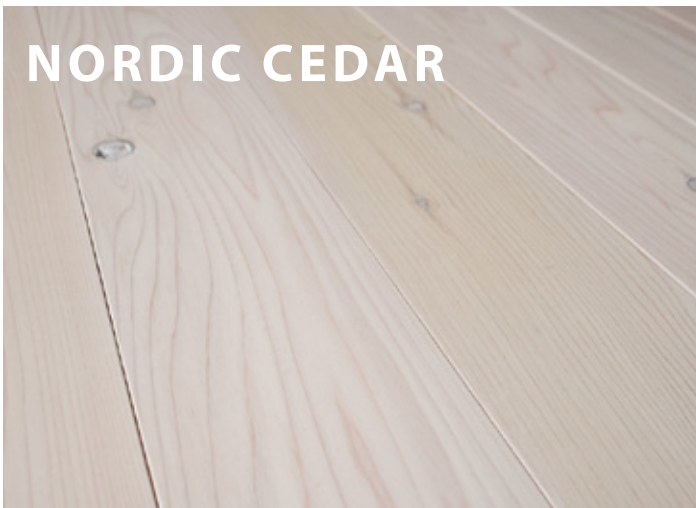

DIMENSIONS SOLID CLADDING:
3/4" thick x 5-1/4" standard width x 4'-12' solid random lengths

GRADE Character Plus Grade

APPLICATION Interior Cladding, Exterior Siding & Custom Applications

FINISHES Specialty Nordic Cedar Finish

SUSTAINABILITY Recovered byproduct from fires and/or harvest of conifer trees along the West Coast. LEED Credits Available.



DIMENSIONS SOLID FLOORING & CLADDING:
3/4" thick x 3, 4 & 5" mixed widths x 1'-5' solid random lengths

THINCLAD PANELING:
3/8" thick x 3, 4 & 5" mixed widths x 1'-5' solid random lengths

ENGINEERED FLOORING:
5/8" thick x (specified width) x 1'-5' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade


APPLICATION Interior Cladding, Ceiling Cladding, Benches & Custom Applications

FINISHES Specialty Nordic Walnut Finish

SUSTAINABILITY Orchard recovery from sources in California. LEED Credits Available.





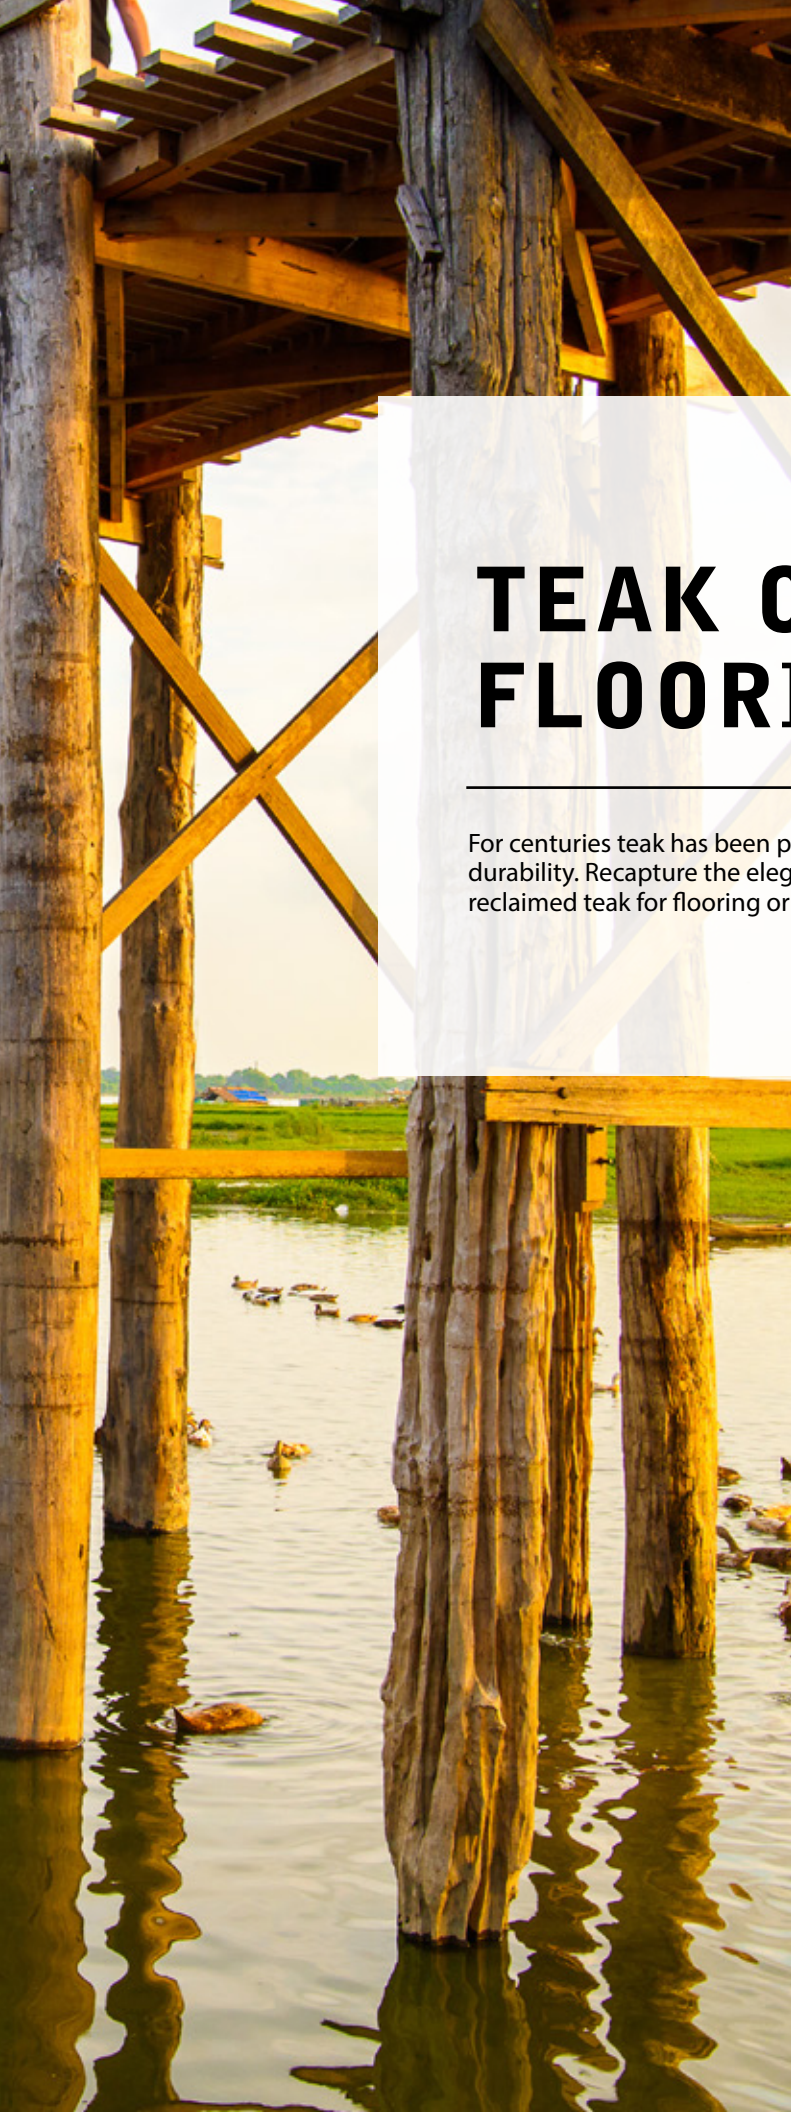

TEAK CLADDING + FLOORING

For centuries teak has been prized for its beauty, strength and durability. Recapture the elegance of old-growth FSC® certified reclaimed teak for flooring or cladding.



SAKHAY TEAK

OIL FINISH



DIMENSIONS SOLID FLOORING & CLADDING:
5/8" thick x 4-1/4" & 5" widths x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 4-1/4" & 5" widths x 2'-10' solid random lengths
ENGINEERED FLOORING & CLADDING:
5/8" thick x 4-1/4" & 5" widths x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade


APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Decking, Benches & Custom Applications

FINISHES Unfinished, Natural Oil Finish, Low-VOC Poly Finish & Custom Finishes Available


SUSTAINABILITY FSC® Certified Post-Consumer Recycled from sources including pole-houses, warehouses and industrial buildings in Asia. LEED Credits Available.



UNFINISHED



OIL FINISH



POLY FINISH




TEAK FLOORING + CLADDING

Sakhay Teak Hardwood Flooring




PELA TEAK

OIL FINISH



UNFINISHED



OIL FINISH



PEARLY TEAK



SUGAR TEAK


DIMENSIONS ENGINEERED FLOORING & CLADDING:
5/8" thick x 3, 4, & 5" mixed widths x 1'-8" solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply new wood substrate

GRADE Character Grade

APPLICATION Flooring, Interior Cladding, Stair Treads, Tables, Benches & Custom Applications

FINISHES Unfinished, Natural Oil Finish & Custom Finishes Available

SUSTAINABILITY FSC® Certified Post-Consumer Recycled from sources including pole-houses, warehouses and industrial buildings in Asia. LEED Credits Available.



DIMENSIONS SOLID CLADDING:
5/8" thick x 4-1/4" & 5" widths x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 4-1/4" & 5" widths x 2'-10' solid random lengths
ENGINEERED CLADDING:
5/8" thick x 4-1/4" & 5" widths x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade

APPLICATION Interior Cladding, Tables, Benches & Custom Applications

FINISHES Specialty Pearly White Finish

SUSTAINABILITY FSC® Certified Post-Consumer Recycled from sources including pole-houses, warehouses and industrial buildings in Asia. LEED Credits Available.



DIMENSIONS SOLID FLOORING & CLADDING:
5/8" thick x 4-1/4" & 5" widths x 1'-10' solid random lengths
THINCLAD PANELING:
3/8" thick x 4-1/4" & 5" widths x 2'-10' solid random lengths
ENGINEERED FLOORING & CLADDING:
5/8" thick x 4-1/4" & 5" widths x 1'-10' solid random lengths.
Wear layer 4mm thick over a 10mm thick, 7-ply birch new wood substrate.

GRADE Character Grade

APPLICATION Interior Cladding, Stair Treads, Flooring, Tables, Benches & Custom Applications

FINISHES Specialty White Oil Sugar Finish

SUSTAINABILITY FSC® Certified Post-Consumer Recycled from sources including pole-houses, warehouses and industrial buildings in Asia. LEED Credits Available.



PROJECT SPOTLIGHT

santa clara university

The Sobrato Campus for Discovery and Innovation at Santa Clara University is a 270,000 square foot facility that offers a progressive teaching and research environment for programs in science, technology, engineering and mathematics (STEM).

This LEED-certified building features reclaimed Sakhay Teak wood flooring, low-VOC finishes and coatings, regionally-sourced materials and energy-efficient design and appliances.

PRODUCT DETAILS

FSC Certified Reclaimed Engineered Sakhay Teak Flooring with Low-VOC Poly Finish

PROJECT DETAILS

Design: ZGF Architects

Location: Santa Clara, CA

Photography: Bruce Damonte



LUMINAT



HARDWOOD FLOORING

Our reclaimed solid and engineered flooring products include red and white oak, Oregon white oak, madrone, tan oak, teak and Douglas fir. We offer FSC® Certified reclaimed wood flooring for LEED projects and other sustainable initiatives.



ZANE GREY OAK



OXLEY OAK



LEFT COAST WHITE OAK



LEGACY WHITE OAK



PACIFIC MADRONE



GRANDSTAND FIR




PACIFIC GOLDEN OAK




HERITAGE OAK




SAWMILL OAK




SAKHAY TEAK



PELA TEAK



ESPRESSO OAK



BIDWELL WALNUT

product spotlight

SAWMILL OAK

Sawmill Oak embraces the rich patina inherent to reclaimed wood. Sourced from barns, out-buildings, warehouses, and factories, it retains the natural and man-made characteristics that embody a true reclaimed spirit.

Deep grooves, checks, saw-trace marks and frequent oxide stains evoke the American Pioneer Spirit. Sawmill Oak adds character to any space as hardwood flooring and wall or ceiling cladding.



Saw Trace Reclaimed Sawmill Oak with Low-VOC Poly Finish Flooring and Cladding




Sawmill Oak Hardwood Flooring
with Low-VOC Poly Finish






Salvaged Cedar Exterior Siding




GRANDSTAND FIR




STOUT'S LEGACY WEATHERED




BUCKHORN CEDAR



SAKHAY TEAK



DEEP SUMI CEDAR

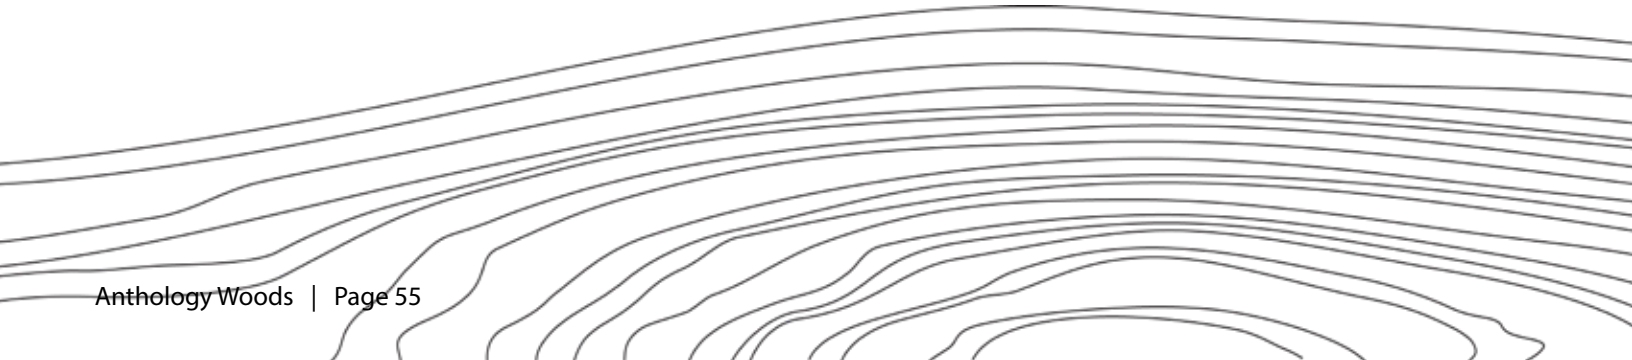



EXTERIOR SIDING & DECKING

Add reclaimed and sustainably-sourced exterior wood siding and decking to your next outdoor patio or deck for a stunning effect

QUALITY MATTERS

We are perfectionists about our wood. We take a highly variable material and transform it into beautiful and functional wood paneling and flooring for small designs to large commercial projects.


We work with you every step of the way, and can help find the right product for your specific project.

Custom colors, finishes and dimensions are always available to provide the perfect solution for your exact needs.

Quality, sustainability & service, always.

You can have it all with our truly unique reclaimed wood filled with history in every plank.



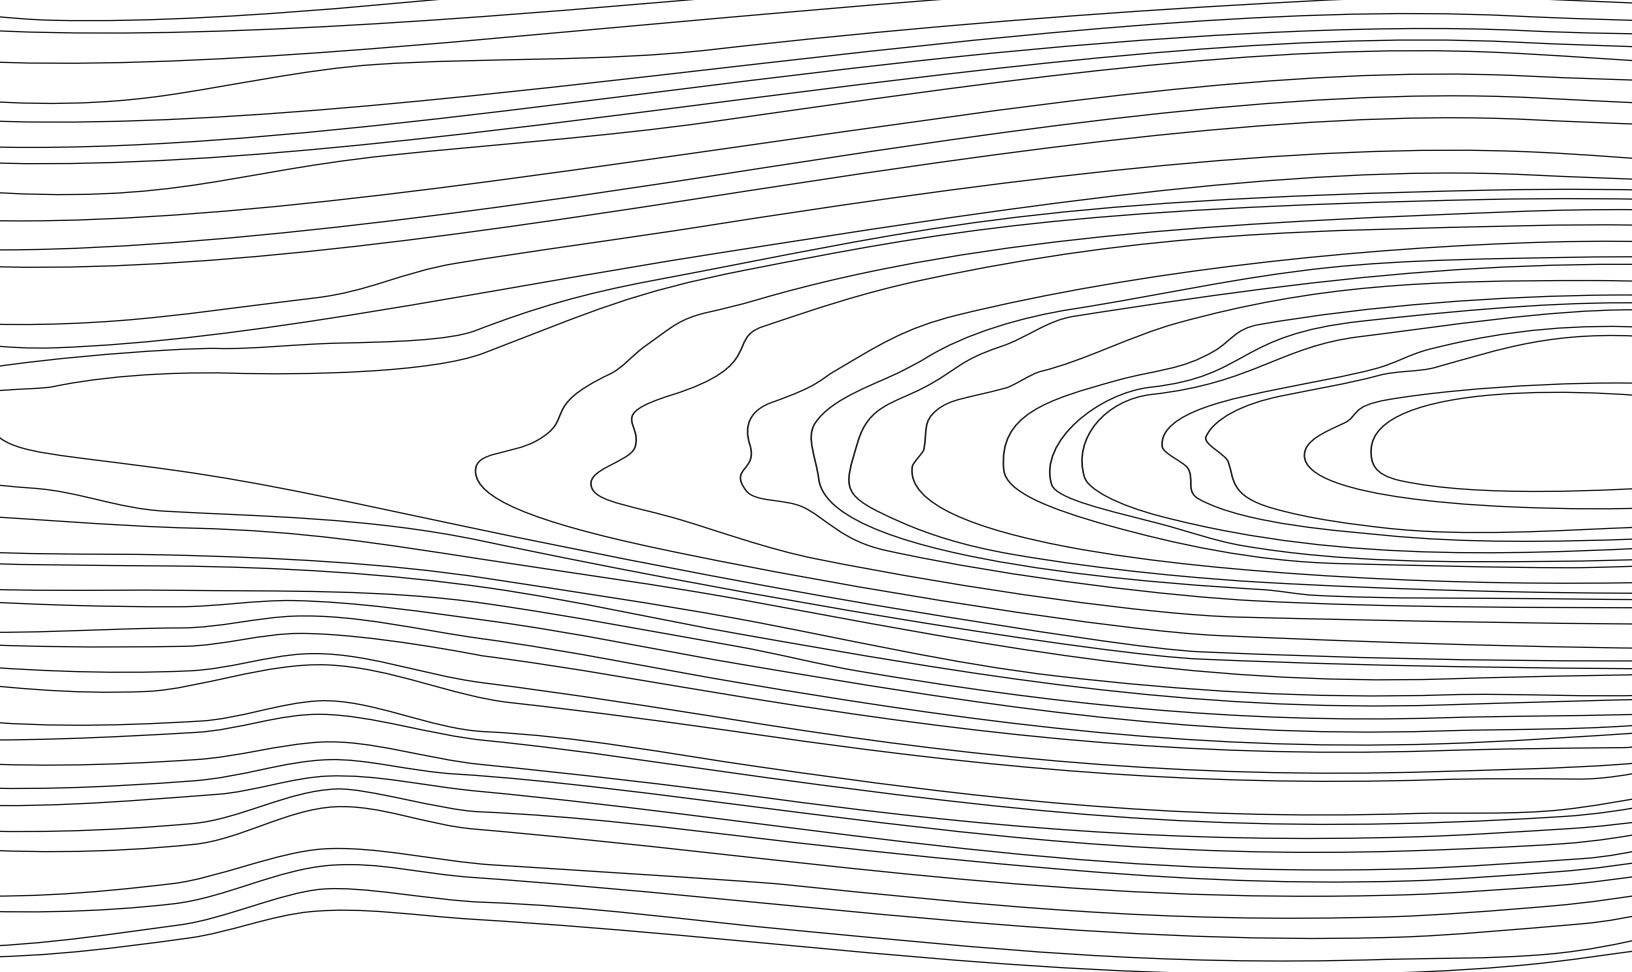



**ANTHOLOGY
WOODS**

**655 Washington Street
Ashland, OR 97520**

1.800.293.8178

info@anthologywoods.com

WOOD WITH A STORY

