





ESPRESSO BROWN OAK

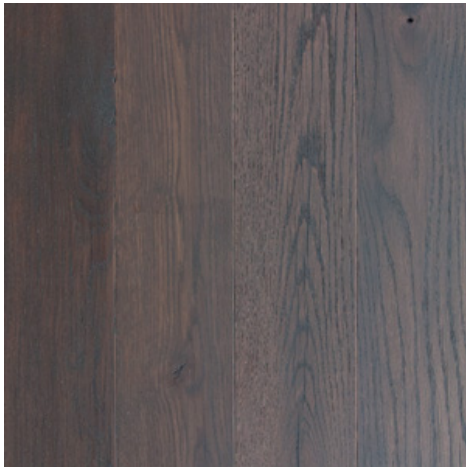

STANDARD FINISH:



DESCRIPTION

Wake up to another delightful coffee experience; your walls and floors drenched in a rich and creamy chocolatey tone, adding luxurious depth to interiors. Our specialty oil finish gives a warm, earthy feeling and shows subtle grain texture. Espresso Brown Oak creates enticing contrast when mixed with lighter accents and enhances dark color palettes.

MILLWORK

Surfaced 4 sides with profile as per specification. Flooring products are back-relieved and end-matched. Custom millwork and dimensions are available.

FLOORING + CLADDING DIMENSIONS

SOLID: 3/4" thick x (specified width) x 1'-10' solid random lengths (or longer, if available)

ENGINEERED: 5/8" thick x (specified width) x 1'-10' random lengths. Wear layer 5/32" (4mm) thick over a 1/2" (12mm) thick plywood substrate.

THINCLAD CLADDING DIMENSIONS

3/8" thick x 5" face width x 1'-10' solid random lengths (or longer, if available)

SOURCE

Various sources depending on wood substrate. FSC® reclaimed, salvaged and FSC new wood options are available.

SUSTAINABILITY

FSC® CERTIFIED:

Recycled or Mixed available upon request

LEED V4

Building Product Disclosure & Optimization
Regional Priority
Building Life-Cycle Impact Reduction
Low-Emitting Materials
Material Ingredients

HARDNESS

White Oak Janka rating: 1360

GRADE

Depends on wood substrate.
Select & Character grade available.
Call for options.

FLAME SPREAD

White Oak: 100 (class C). Class A flame retardant coatings are available

APPLICATION

Interior Wall & Ceiling Cladding, Flooring and Custom Applications

MINIMUM ORDER

250 sq.ft. or 500 sq.ft. for engineered


LEAD TIME

2-6 Weeks (or less)



Note: Wood is a natural substance and varies in appearance. Please refer to product images or request samples for a broader representation of the color and character of your selection.

APPLICATION	STANDARD WIDTH(S)	OTHER WIDTH(S)	THICKNESS	GRADE	PROFILE
Solid Flooring + Cladding	5" Fixed	3-10"	3/4" Thick	Select or Character	T+G
ThinClad Interior Cladding	5" Fixed	3, 4, 5" Mixed	3/8" Thick	Select or Character	T+G
Engineered Flooring + Cladding	5" Fixed	3-10"	5/8" Thick	Select or Character	T+G Micro-Bevel
A variety of fixed and mixed widths are available up to 10" wide. Please inquire for more information.				Inquire to create your custom specification	



TONGUE + GROOVE

Standard profile (other profiles available)



T+G: MICRO BEVEL

Standard on most engineered products, recommended for most pre-finished items & wall cladding



T+G: THINCLAD MICRO-BEVEL

Recommended for interior wall cladding



T+G: ENGINEERED WITH MICRO-BEVEL

Recommended for flooring installed over concrete sub-floor



FINISHES

We apply low-VOC and eco-friendly finishes to enhance the natural beauty of the wood for durability and easy maintenance.

CUSTOMIZATION

We offer custom specifications for this product, including dimensions, finishes and profiles for a unique look. Please inquire.

PATTERNS

We can manufacture the engineered product in a variety of patterns, including chevron and herringbone patterns.



LIVING FUTURE
CORPORATE MEMBER

Declare.



ANTHOLOGY WOODS

1.800.293.8178
www.anthologywoods.com
info@anthologywoods.com