



ANTHOLOGY
WOODS


SPECIFIER'S GUIDE
+ TECHNICAL DATA

FRONTIER BLEND


RUSTIC FRONTIER BLEND

ANTIQUE FRONTIER BLEND

STANDARD FINISHES



RUSTIC



ANTIQUE



CUSTOM
FINISHES
ALSO AVAILABLE

DESCRIPTION

FSC® reclaimed Frontier Blend shows a natural weathered face with rich texture for interior wood wall cladding. Frontier Blend showcases reclaimed northwest woods with a naturally aged patina in muted color tones. The classic old wood barn board look, Frontier Blend consists of earthy browns, camel and some grays with saw trace and grain. Choose from weathered Rustic Frontier Blend or skip-planed Antique Frontier Blend.

SPECIES

Pseudotsuga menziesii

APPLICATION

Interior Cladding, Exterior Siding & Custom Applications

MILLWORK

Surfaced 4 sides, with a tongue & groove profile. Custom millwork & dimensions are available.

CLADDING + SIDING DIMENSIONS

5/8" thick x 3, 5 & 7" mixed widths x 1'-10' solid random lengths (or longer, if available)

SOURCE

FSC Certified Recycled from structures in the Pacific Northwest United States.

SUSTAINABILITY

LEED V4

Building Product Disclosure & Optimization
Regional Priority
Low-Emitting Materials
Material Ingredients

DECLARE LABEL: Red List Approved for Unfinished, Oil and Poly Finish

HPD: Published HPD

GREENGUARD GOLD: Standard Oil & Poly Finishes are Greenguard Gold Certified

HARDNESS

Douglas Fir Janka rating 660. Suitable for wall/ceiling cladding in indoor environments. Inquire for guidance on exterior applications.

GRADE

Naturally distressed face with ranges of brown, khaki, tan & gray patina. Insect holes, tight, cracked, or missing knots up to 2" diameter, staining or discoloration, surface checking, small fastener holes, oxide stains & other possible signs of previous use.

FLAME SPREAD


USDA FSI Not Noted. Class A flame retardant coatings are available

MINIMUM ORDER

250 sq.ft.


LEAD TIME

2-6 Weeks (or less)




Note: Wood is a natural substance and varies in appearance. Please refer to product images or request samples for a broader representation of the color and character of your selection.

APPLICATION	STANDARD WIDTH(S)	THICKNESS	FINISH	PROFILE
Interior Cladding + Siding	3, 5, & 7" Mixed Widths	5/8" Thick	Unfinished, Oil or Poly Finish	T+G
Custom profiles are available. Custom factory stains and finishes available on most products. May be engineered for orders over 800 square feet. Please inquire for more information.			Inquire to create your custom specification	



TONGUE + GROOVE

Standard profile (other profiles available)




T+G: MICRO BEVEL

Standard on most engineered products, recommended for most pre-finished items & wall cladding



T+G: SQUARE CHANNEL REVEAL

Standard on most solid cladding products and exterior siding

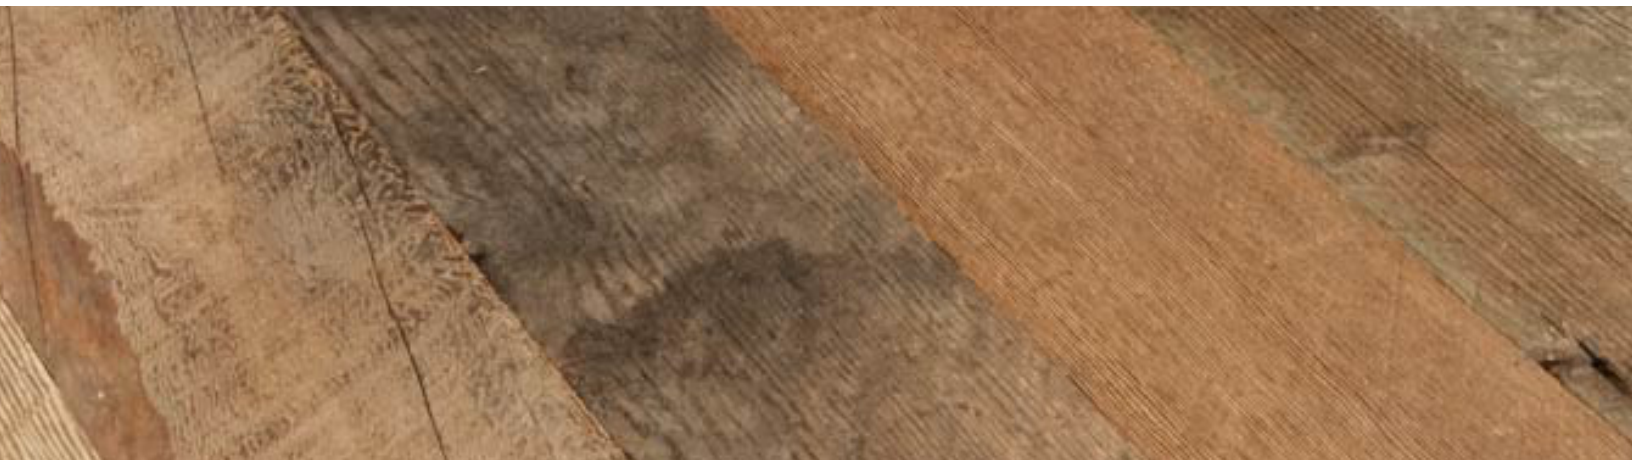

FINISHES

We apply low-VOC and eco-friendly finishes to enhance the natural beauty of the wood for durability and easy maintenance.

CUSTOMIZATION

We offer custom specifications for this product, including dimensions, finishes and profiles for a unique look. Please inquire.

PATTERNS

We can manufacture engineered products in a variety of patterns, including chevron and herringbone patterns.



LIVING FUTURE
CORPORATE MEMBER



Declare.

ANTHOLOGY WOODS

1.800.293.8178
www.anthologywoods.com
info@anthologywoods.com