





# PEARLY WHITE OAK

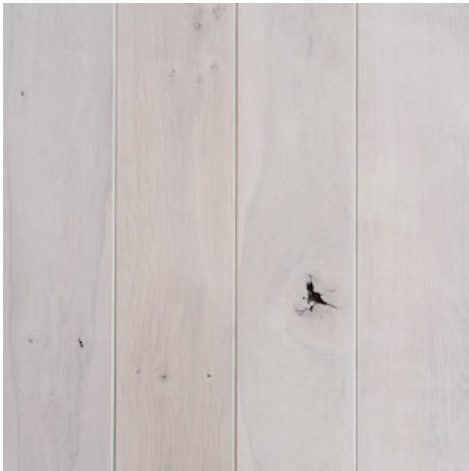

## STANDARD FINISH:



## DESCRIPTION

For a modern and elegant effect, Pearly White Oak adds a timeless and ethereal backdrop to any interior space. The specialty frosted white finish adds an immaculate neutral tone, evoking tranquility and spaciousness. You'll see soft cerused grain patterning beneath the ivory white tones, creating subtle visual interest and alluring texture.

## MILLWORK

Surfaced 4 sides with profile as per specification. Custom millwork and dimensions are available.

## CLADDING DIMENSIONS

**SOLID:** 3/4" thick x (specified width) x 1'-10' solid random lengths (or longer, if available)

**ENGINEERED:** 5/8" thick x (specified width) x 1'-10' random lengths (or longer, if available). Wear layer 5/32" (4mm) thick over a 1/2" (12mm) thick plywood substrate.

## THINCLAD CLADDING DIMENSIONS

3/8" thick x 5" face width x 1'-10' solid random lengths (or longer, if available)

## SOURCE

Various sources depending on wood substrate. FSC® reclaimed, salvaged and FSC new wood options are available.

## SUSTAINABILITY

### FSC® CERTIFIED:

Recycled or Mixed available upon request

### LEED V4

Building Product Disclosure & Optimization  
Regional Priority  
Building Life-Cycle Impact Reduction  
Low-Emitting Materials  
Material Ingredients

## HARDNESS

White Oak Janka rating: 1360

## GRADE

Depends on wood substrate. Select & Character grade available. Call for options.

## FLAME SPREAD

White Oak: 100 (class C). Class A flame retardant coatings are available.

## APPLICATION

Interior Wall & Ceiling Cladding, and Custom Applications

## MINIMUM ORDER

250 sq.ft. or 500 sq.ft. for engineered.

## LEAD TIME

2-6 Weeks (or less)



Note: Wood is a natural substance and varies in appearance. Please refer to product images or request samples for a broader representation of the color and character of your selection.

APPLICATION	STANDARD WIDTH(S)	OTHER WIDTH(S)	THICKNESS	GRADE	PROFILE
Interior Cladding	5" Fixed	3-10"	3/4" Thick	Select or Character	T+G
ThinClad Interior Cladding	5" Fixed	3, 4, 5" Mixed	3/8" Thick	Select or Character	T+G
Engineered Cladding	5" Fixed	3-10"	5/8" Thick	Select or Character	T+G Micro-Bevel
A variety of fixed and mixed widths are available up to 10" wide. Please inquire for more information.				Inquire to create your custom specification	




**TONGUE + GROOVE**

Standard profile (other profiles available)



**T+G: MICRO BEVEL**

Standard on most engineered products, recommended for most pre-finished items & wall cladding



**T+G: THINCLAD MICRO-BEVEL**

Recommended for interior wall cladding



**T+G: ENGINEERED WITH MICRO-BEVEL**

Recommended for flooring installed over concrete sub-floor



## FINISHES

We apply low-VOC and eco-friendly finishes to enhance the natural beauty of the wood for durability and easy maintenance.

## CUSTOMIZATION



We offer custom specifications for this product, including dimensions, finishes and profiles for a unique look. Please inquire.

## PATTERNS

We can manufacture the engineered product in a variety of patterns, including chevron and herringbone patterns.



**LIVING FUTURE**  
CORPORATE MEMBER



## ANTHOLOGY WOODS

1.800.293.8178  
www.anthologywoods.com  
info@anthologywoods.com