






# REDISCOVERED REDWOOD

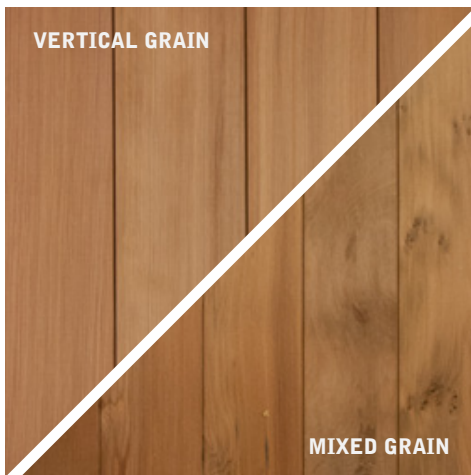


## STANDARD FINISHES




VG UNFINISHED



VG OIL FINISH



MG UNFINISHED



MG OIL FINISH



CUSTOM  
FINISHES  
ALSO AVAILABLE

## DESCRIPTION

You just can't find Redwood like this anymore. For about 50 years now, these majestic trees have been preserved and protected in their native coastal California growing range. Redwood's amazing resistance to decay allows us to go back into areas logged many decades ago and recover the "rejects" of the time. Available in Mixed Grain for interior applications and premium clear Vertical Grain for Decking and exterior Siding.

## SPECIES

Sequoia sempervirens

## MILLWORK

SIDING: Surfaced 4 sides, tongue and groove with square channel reveal

DECKING: Surfaced 4 Sides, square edge planks with eased edges (E4E) at 1/8" radius

THINCLAD: Surfaced 4 sides, tongue & groove with micro bevel edges

## CLADDING + SIDING DIMENSIONS

SIDING: 1 1/16" thick x 5-1/4" wide x 4'-12' solid random lengths (or longer, if available)

DECKING: 1-1/2" thick x 5-1/2" wide x 4'-12' solid random lengths (or longer, if available)

THINCLAD: 3/8" thick x 5-1/2" wide x 1'-10' solid random lengths (or longer, if available)

## SOURCE

Redwood recovered from urban, forest & water sources

## SUSTAINABILITY

LEED V4

Building Product Disclosure & Optimization


Regional Priority

Low-Emitting Materials

Material Ingredients

DECLARE LABEL: Red List Approved for Unfinished, Oil and Poly Finish

GREENGUARD GOLD: Standard Oil & Poly Finishes are Greenguard Gold Certified



## HARDNESS

Janka rating 450

## GRADE

VERTICAL GRAIN: Character may include small tight knots and unlimited natural color variation

MIXED GRAIN: Allows unlimited color and grain variation, sound knots of unlimited size and oxide stains

## FLAME SPREAD

USDA FSI Redwood: 75 (class B). Class A flame retardant coatings are available.

## APPLICATION

Exterior Siding, Interior Cladding, Table Tops, Decking and Custom Millwork

## MINIMUM ORDER

250 sq.ft.

## LEAD TIME

2-6 Weeks (or less)

Note: Wood is a natural substance and varies in appearance. Please refer to product images or request samples for a broader representation of the color and character of your selection.

APPLICATION	STANDARD WIDTH(S)	THICKNESS	GRAIN	FINISH	PROFILE
Siding & Cladding	5-1/4"	11/16" Thick	Mixed or Vertical	Unfinished, Oil or Poly	T+G: Square Channel Reveal
Exterior Decking	5-1/2"	1-1/2" Thick	Mixed or Vertical	Unfinished, Oil or Poly	Eased Four Edges
ThinClad Paneling	5-1/2"	3/8" Thick	Mixed or Vertical	Unfinished, Oil or Poly	T+G: Micor-Bevel

Fixed and mixed widths are available from 3" to 10" wide. Custom thicknesses available up to 2-1/2" thick and custom profiles, finishes & applications are available. Please inquire for more information.

Inquire to create your custom specification




**TONGUE + GROOVE**

Standard profile (other profiles available)




**T+G: MICRO BEVEL**

Standard on most engineered products, recommended for most pre-finished items & wall cladding



**T+G: SQUARE CHANNEL REVEAL**

Standard on most solid cladding products and exterior siding



**EASED FOUR EDGES (E4E)**

Standard on most decking products



### FINISHES

We apply low-VOC and eco-friendly finishes to enhance the natural beauty of the wood for durability and easy maintenance.

### CUSTOMIZATION

We offer custom specifications for this product, including dimensions, finishes and profiles for a unique look. Please inquire.

### PATTERNS

We can manufacture engineered products in a variety of patterns, including chevron and herringbone patterns.



**LIVING FUTURE**  
CORPORATE MEMBER



**ANTHOLOGY WOODS**



1.800.293.8178  
www.anthologywoods.com  
info@anthologywoods.com