




SUPER BOWL FIR



STANDARD FINISHES



DESCRIPTION

Our FSC® reclaimed Super Bowl Fir shows a soft surfaced finish perfect for interior accents and applications. This wood showcases reclaimed fir with a planed surface in warm color tones. Super Bowl Fir consists of earthy browns, camel and khaki tones with an array of character, from knots to nail holes.

SPECIES

Pseudotsuga menziesi

APPLICATION

Flooring, Interior Cladding, Exterior Siding, Table Tops, and Custom Applications.

MILLWORK

Surfaced 4 sides, tongue & groove profile. Flooring products are back-relieved & end matched. ThinClad planks have a micro-bevel T&G.

FLOORING + CLADDING DIMENSIONS

SOLID: 5/8" thick x 5" fixed width x 1'-10' solid random lengths (or longer, if available)

THINCLAD DIMENSIONS

3/8" thick x 5" face width x 1'-10' solid random lengths (or longer, if available)

SOURCE

Reclaimed fir from event structures across the United States

SUSTAINABILITY

LEED V4

Building Product Disclosure & Optimization

Regional Priority

Low-Emitting Materials

Material Ingredients

DECLARE LABEL: Red List Approved for Unfinished, Oil & Poly Finish

GREENGUARD GOLD: Standard Oil & Poly Finishes are Greenguard Gold Certified

HARDNESS

Douglas Fir Janka rating 660. Suitable for wall/ceiling cladding in indoor environments and rustic flooring applications (wood will continue to patina from traffic). Inquire for guidance in exterior applications.

GRADE

Natural fir color tones with ranges of warm brown, khaki & tan. Insect holes, tight, cracked, or missing knots up to 2" diameter, staining or discoloration, surface checking, small fastener holes, oxide stains & other possible signs of previous use.

FLAME SPREAD

USDA FSI Douglas Fir: 100 (class C). Class A flame retardant coatings are available

MINIMUM ORDER

250 sq.ft.

LEAD TIME

2-6 Weeks (or less)




Note: Wood is a natural substance and varies in appearance. Please refer to product images or request samples for a broader representation of the color and character of your selection.

APPLICATION	STANDARD WIDTH(S)	OTHER WIDTH(S)	THICKNESS	FINISH	PROFILE
Flooring + Interior Cladding	5" Fixed	3-8"	5/8" Thick	Unfinished, Oil or Poly Finish	T+G
ThinClad Interior Cladding	5" Fixed	3, 4, & 5" Mixed	3/8" Thick	Unfinished, Oil or Poly Finish	T+G Micro-Bevel

Fixed and mixed widths are available from 3" to 8" wide (and wider in limited availability). Custom profiles are available. Please inquire for more information.

Inquire to create your custom specification




TONGUE + GROOVE

Standard profile (other profiles available)




T+G: MICRO BEVEL

Standard on most engineered products, recommended for most pre-finished items & wall cladding



T+G: THINCLAD MICRO-BEVEL

Recommended for interior wall cladding

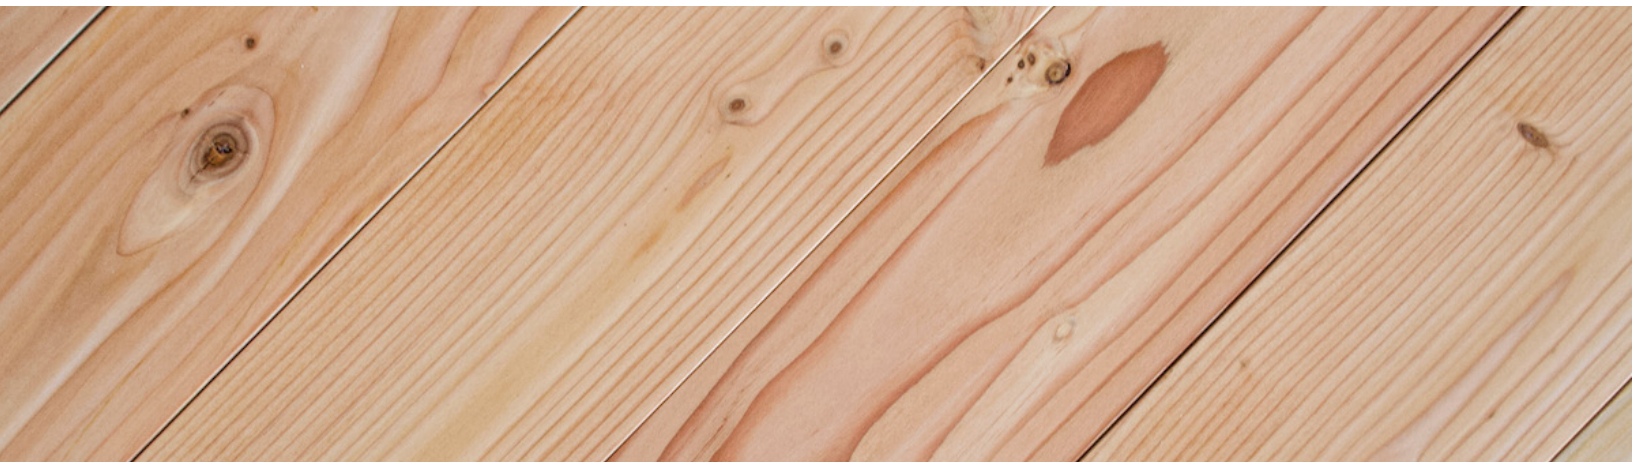

FINISHES

We apply low-VOC and eco-friendly finishes to enhance the natural beauty of the wood for durability and easy maintenance.

CUSTOMIZATION

We offer custom specifications for this product, including dimensions, finishes and profiles for a unique look. Please inquire.

PATTERNS

We can manufacture engineered products in a variety of patterns, including chevron and herringbone patterns.



ANTHOLOGY WOODS

1.800.293.8178
www.anthologywoods.com
info@anthologywoods.com